

UltraDish™ TP 24


TPA for C5c



PERFORMANCE


UD-TP-24	
Gain	24.4 dBi
Frequency Range	5180 - 6775 MHz
Azimuth Beam Width -6 dB	H 12° / V 11°
Elevation Beam Width -6 dB	H 11° / V 12°
Beam Efficiency	40%
Front-to-Back Ratio (Min)	35 dB
TP-ADAP-C5c	
Polarization	Dual Linear H + V
Impedance	50 Ohm

Azimuth Pattern H




H - Port Pattern Azimuth 5.6 GHz

Elevation Pattern H




H - Port Pattern Elevation 5.6 GHz

Azimuth Pattern V




V - Port Pattern Azimuth 5.6 GHz

Elevation Pattern V



V - Port Pattern Elevation 5.6 GHz

REALIZED GAIN AND VSWR

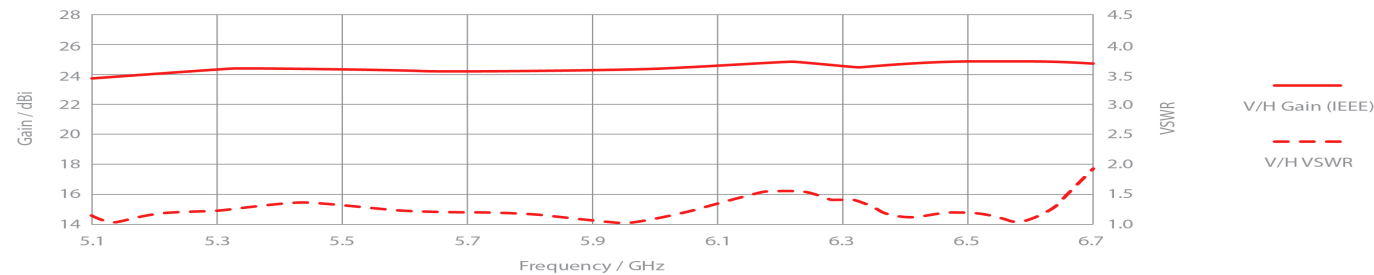

NOMINAL GAIN

